

Bread slicers for professionals



DURO

Robust construction

Progressive traction lever

Available as single or dual slice models

5 years parts / 1 year labor warranty

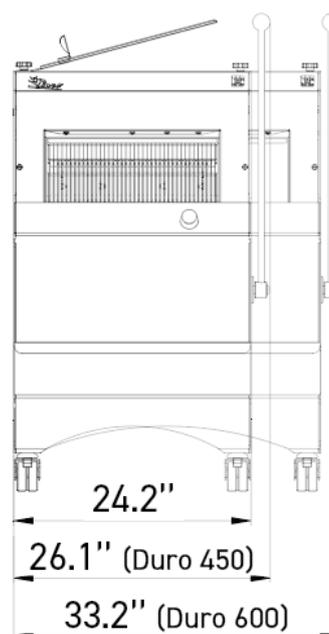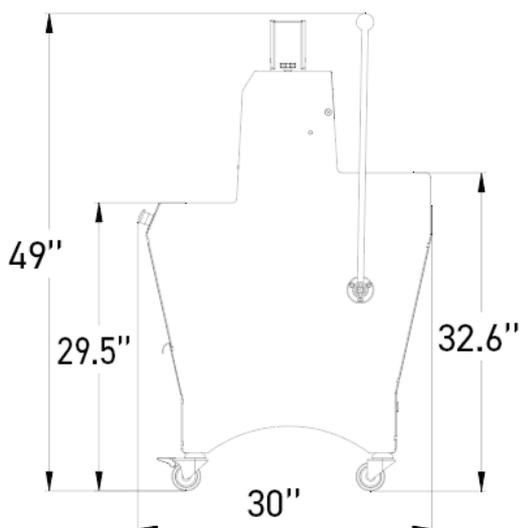


SPECIFICATIONS

Max. loaf dimensions in in (L x W x H)	17.3" x 12.6" x 6.3"
Motor power in kW	0.49
Type of motor	1ph/120V/60Hz/7.3A
Plug configuration	NEMA 5-15P
Net weight in lbs	331

TECHNICAL SPECIFICATIONS

Slice thickness options (in mm)	3/8" (10mm), 7/16" (11mm), 1/2" (13mm), 3/4" (19mm) (Extra cost), 7/8" (22mm) (Extra cost), 1" (25mm) (Extra cost), 1 1/4" (31mm) (Extra cost), Special slice thickness (Extra cost), 1 1/4" (31mm)
Options (Additional cost)	1.6" height adjustment

MAIN STRENGTHS



Double slice thickness (option)

Allows two different slicing widths on the same machine



Progressive traction lever

Provides better control of effort.



ETL Sanitation Listed and ETL Listed US & Canada

The ETL Sanitation mark is awarded to food service equipment that has been rigorously tested against national sanitation requirements. This mark ensures you that the equipment is fit for use during food production as the manufacturer has not only passed the initial testing, but remains in compliance by completing periodic follow-up inspections. If the ETL Listed mark has a "US" to the bottom right, it has passed U.S. product safety standards. If it has a "C" to the bottom left, it has passed Canadian product safety standards. If the ETL mark displays both identifiers, it meets both standards.



Plug configuration

NEMA 5-15P



Partners

JAC is a member of these different associations



BPA-free paint

100% BPA-free satin paint (Bisphenol A): safer for you, gentler on the planet. Its low-temperature curing process significantly reduces energy consumption. Available in three solid colours: white, black or grey.